



TECHNICAL SPECIFICATIONS

ACTIVE
BIRTHPOOLS
www.activebirthpools.com

Active II Birth Pool

Material	Ficore composite
Capacity	560 liter / 145 gal (4" below rim)
Height	770mm / 30.25"
Width	1650mm / 65"
Length	1965mm / 72.25"
Water Depth	640mm / 25" (4" below rim)
Weight (empty)	100kg / 220 lbs
Shipping Crate	205 x 181 x 97cm / 81" x 71" x 38"
Shipping Weight	220kg / 485 lbs
Birth Stool	2 - 1 @ water level, 1 submerged
Handles	2 - Chrome, permanent (Electrical grounding available upon request)
Drain Mechanism	40mm / 1 1/2" Mechanical pop-up—brass with cable mechanism, rim mounted control, removable and height adjustable chrome stopper
Waste Plumbing	40mm / 1 1/2" PVC - Shallow P-trap included - thru-wall (or thru-floor connection - omit supplied p-trap)
Access Panel	2 - right and left rear of pool - 10mm hex key lock
Chromotherapy Light (optional)	1 - 9 light, 11 color LED: White, light blue, dark blue, purple, magenta, red, pink, orange, yellow, light green, dark green
Transformer (optional)	120VAC to 12VDC 0.5A - CSA and UL Certified - NEMA 5-15 plug
Light Controls (optional)	Rim mounted - chrome, sealed, four button - Mounted on right side unless specified
Step Stool (optional)	18" x 12" x 6", 8.5 lbs, Ficore composite

www.activebirthpools.com

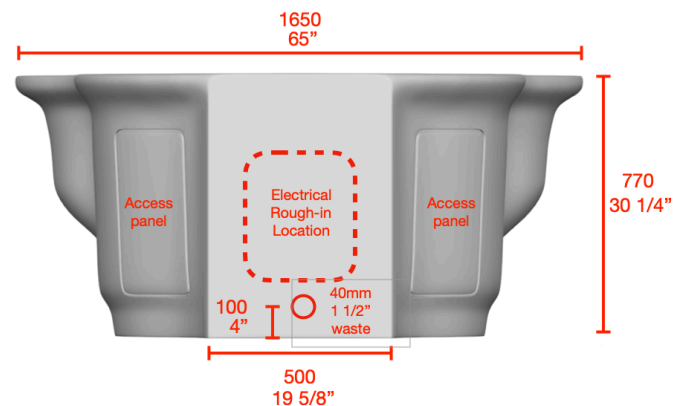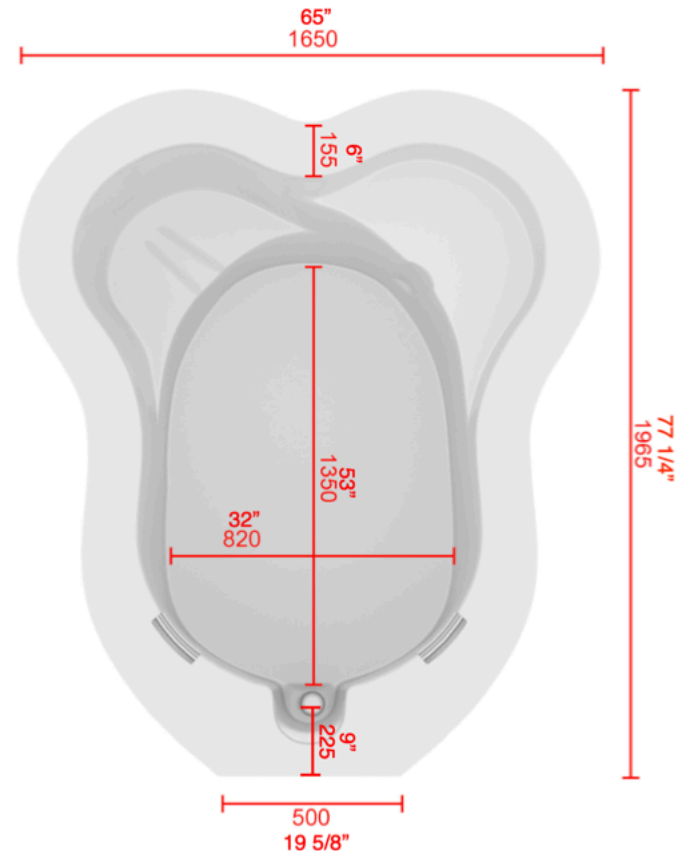

NOTE: Dimensions are in millimeters if not indicated otherwise.